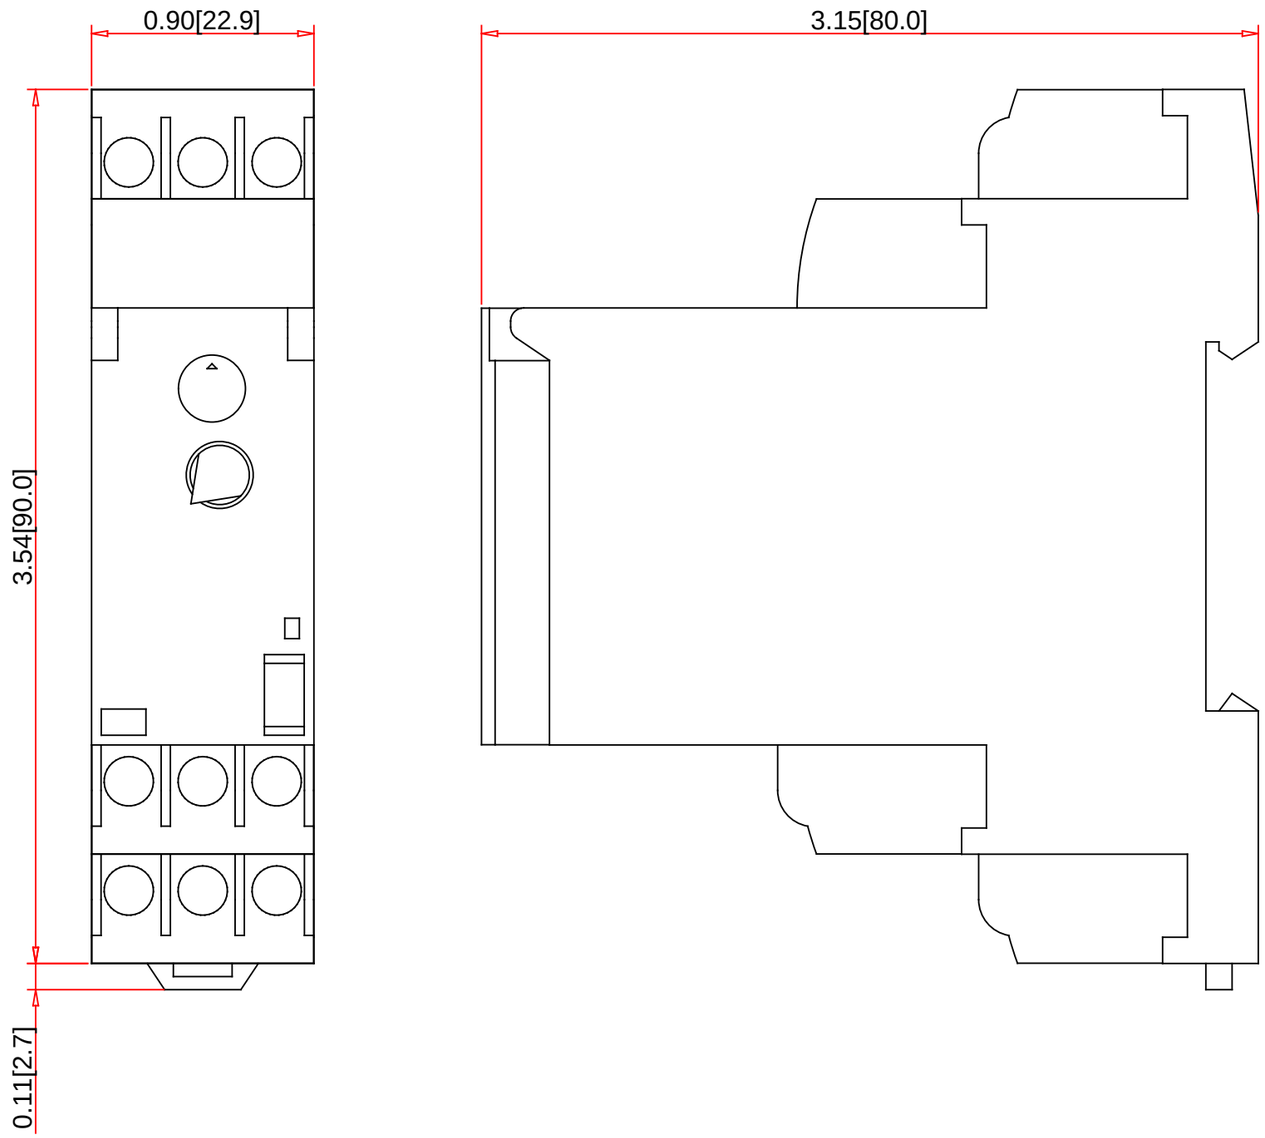


Note:
- Drawings Not To Scale
- Drawings Subject to Change Without Notice
- Dimensions are inches next to [Millimeters]

Part No.:

RE22R1QCMU

Schneider Electric United States
North American Division
Boston One Campus
800 Federal Street
Andover, MA 01810, USA
Phone:+1 8773425173
Email: CCC@us.schneider-electric.com

Technical Information:

Max. Switching Current:	8A
Max. Switching Voltage:	250 V
Max. Power Consuption:	3VA (AC), 0.6W (DC)
Input Signals	none
Function Available:	Qc
Function Description:	Star-delta timing
Time Ranges:	0.05 to 300 s
Type of Output:	Relay
Contact Configuration:	SPDT

Specification:

Description:	Timer, 24-240 VAC/VDC Input, 8A SPDT Relay Output, Star-Delta
Ambient Storage Temp.:	-40 to +70 °C (-40 to +158 °F)
Ambient Operating Temp.:	-20 to +60 °C (-4 to +140 °F)
Degree of Protection Term. Block:	IP20
Degree of Protection Housing:	IP40
Electrical Life @ Rated Load:	100,000 cycles
Mechanical Life @ Rated Load:	20,000,000 cycles
Dial Settings:	Range = 1s to 300s, Time setting = 1 to 10
Mounting:	35 mm DIN Rail